



► Katherm NK  
Trench Heating

# Katherm NK

The Perfect Embodiment of Natural Convection

► **Technical Catalogue**

**KAMPMANN**



# Contents

## 01 ▶ Product Information 6

▶ Overview	7
▶ Product Data	8
▶ Selection Assistance: Overview of Models	9
▶ Katherm NK at a Glance	10
▶ Grilles	12
▶ Katherm NK – supply air modules ZL	14

## 02 ▶ Technical Data 16

▶ Advice on Measuring Conditions	17
▶ Katherm NK 137, trench height 92 mm / 120 mm	18
▶ Katherm NK 182, trench height 92 mm / 120 mm / 150 mm / 200 mm	20
▶ Katherm NK 232, trench height 92 mm / 120 mm / 150 mm / 200 mm	22
▶ Katherm NK 300, trench height 92 mm / 120 mm / 150 mm / 200 mm	24
▶ Katherm NK 380, trench height 92 mm / 120 mm / 150 mm / 200 mm	26

## 03 ▶ Design Information 28

▶ Information for Planning and Design	29
---------------------------------------	----

## 04 ▶ Control 30

▶ Electrical Control	30
----------------------	----

## 05 ▶ Ordering Information 34

▶ Katherm NK	34
▶ Accessories	35





Katherm NK:  
Optimised  
performance with  
a wide range of  
dimensions





Porsche Centre, Moscow:  
2,500 m<sup>2</sup> showroom in one of  
Moscow's main traffic arteries –  
fit-out for sales rooms and repair  
workshop



# 01 ▶ Product Information

---





## Katherm NK – high-performance, efficient, wide range

Heaters positioned in front of windows are often unacceptable for aesthetic reasons in modern offices and other buildings with large glazed windows. At the same time, the needs of the users of the space to the aesthetics of the space also increase.

Structurally improved thanks to measurements in Kampmann's R&D Centre, the Katherm NK is a trench heater with optimised performance and a greater range of standard units. The window-side arrangement of the convector ensures efficient screening of cold air with all trench widths.

Katherm NK trench heaters are installed either in screed or within a raised floor, depending on the desired height, underneath floor-to-ceiling glazing. High-output performance, even at low system temperatures, they are ideal at effectively screening

cold air, to supply supplementary heat or even to provide effective at in addition to more effectively or even as a complete space heating system.

### Operation


Cooled air sinks into the floor trench, flows below or at the side of the water-heated convector, then through it and then rises as heated air towards the glazing. The warm air enters the room draught-free and falls to the ground when it cools, thereby producing gentle air recirculation in the room. The silent operation of natural convection in the rooms also adds to the cosy 'feel good' climate in the room. The heat outputs are ideally adapted to the heat requirement, depending on the height and width.

### Control

Optional electromechanical control is provided by the combination of a room thermostat and a clock thermostat, either surface-mounted or flush-mounted, with thermostatic valves and actuators.

### Katherm NK 232


(Installed in screed, trench height 120 mm)

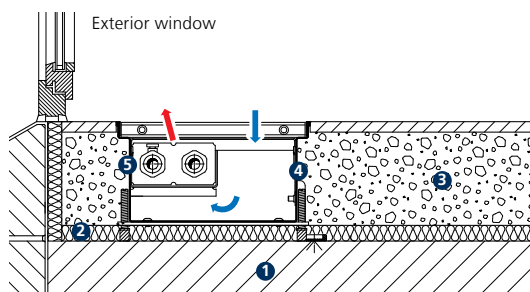

- ① Concrete floor
- ② Heat and sound insulation
- ③ Screed
- ④ Floor trench
- ⑤ Highoutput convector

### Katherm NK 380

(Installed in the raised floor, trench height 200 mm)

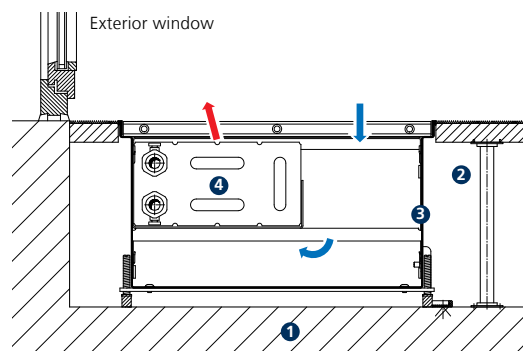

- ① Concrete floor
- ② False floor
- ③ Floor trench
- ④ Highoutput convector

# Product Data



## Product Features

- ▶ Particularly beneficial in modern buildings with large windows
- ▶ With natural convection for complete room heating, supplementary heating and/or cold air screening
- ▶ Adaptation of length by trench extensions provided by empty trenches or by coupling standard lengths together
- ▶ Convenient surface- or flush-mounted electrical controller



## Features

### Standard range

5 trench widths, 22 trench lengths, 4 trench heights. Notwithstanding the standard range (NP), the products can also be individually manufactured in line with the non-standard programme (MP).

- |                    |           |
|--------------------|-----------|
| <b>Convection</b>  | ▶ Natural |
| <b>Heating</b>     | ▶ LPHW    |
| <b>Cooling</b>     | ▶ ---     |
| <b>Ventilation</b> | ▶ ---     |
| <b>KaControl</b>   | ▶ ---     |
| <b>System</b>      | ▶ 2-pipe  |

### Grille finishes

- ▶ Roll-up grilles
- ▶ Linear grilles

## Performance data

### Heat output<sup>1)</sup> [W]

- ▶ 78–5590

## Uses

Cold air screening is specifically provided using the particular properties of natural convection: optimum in rooms in which no free-standing heaters are possible for visual reasons.



Hotels/  
motels



Sales rooms  
and  
showrooms



Office and  
meeting  
rooms



Residential  
areas and  
conservatories



Restaurants  
and cafés


<sup>1)</sup> at LPHW 75/65,  $t_{l1}=20^{\circ}\text{C}$




# Selection Assistance: Overview of Models

Model	Trench width	Trench height	Trench length (200 mm increment)	Heat output <sup>1)</sup>	Further information
	[mm]	[mm]	[mm]	[W]	
<b>NK 137</b>	137	92	800–5000	78–1050	► Page 16
		120			
<b>NK 182</b>	182	92	800–5000	132–2084	► Page 18
		120			
		150			
		200			
<b>NK 232</b>	232	92	800–5000	157–3010	► Page 20
		120			
		150			
		200			
<b>NK 300</b>	300	92	800–5000	209–4003	► Page 22
		120			
		150			
		200			
<b>NK 380</b>	380	92	800–5000	279–5590	► Page 24
		120			
		150			
		200			


## Cross-sectional views (Trench height 120 mm)




Katherm NK 137




Katherm NK 182



Katherm NK 232




Katherm NK 300

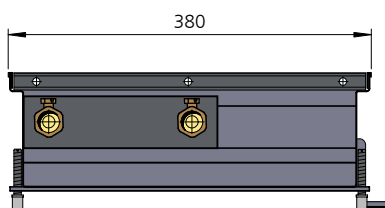

Katherm NK 380

<sup>1)</sup> at LPHW 75/65,  $t_L = 20^\circ\text{C}$ , heat outputs in compliance with DIN EN 16430 Parts 1 and 2


## Katherm NK at a Glance

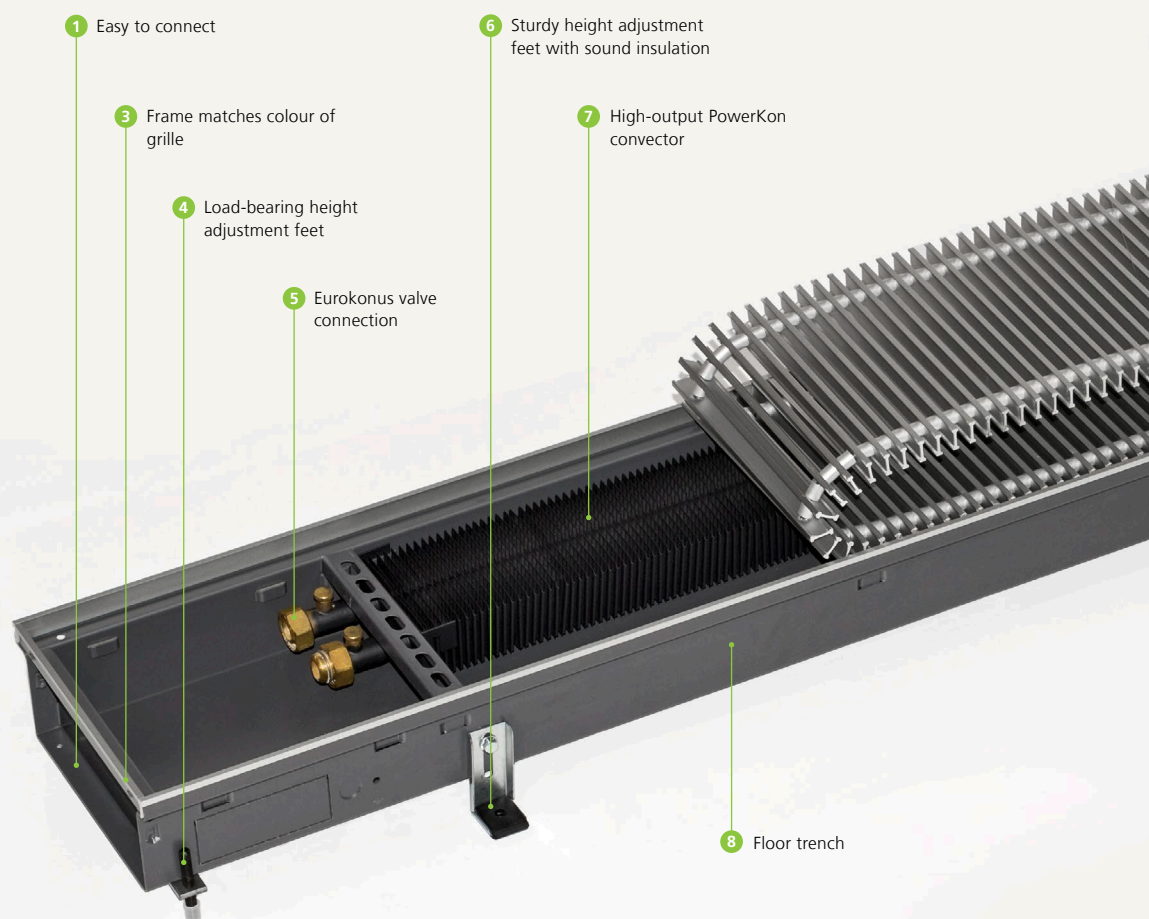

### Features:



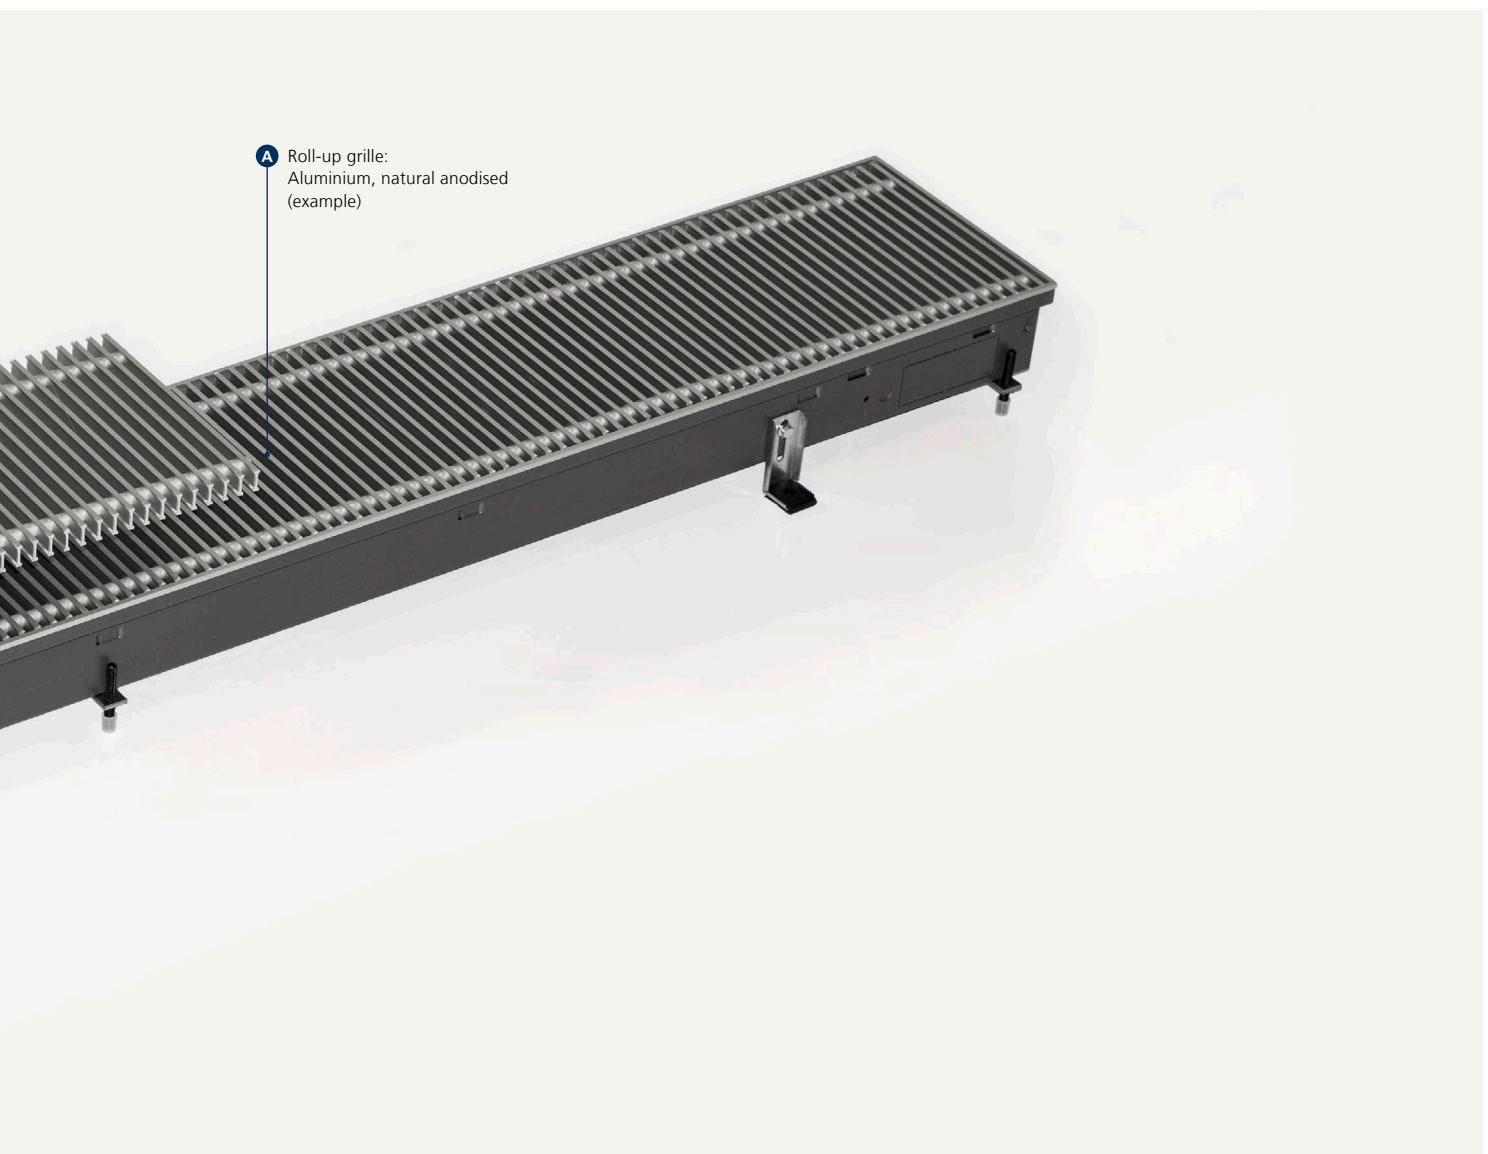

**1 Easy to connect:**

- › Removable end panel for ease of connection of trenches

**2 Cover plate:**

- › As visual protection and to protect against dirt

**3 Frame matches colour of grille****4 Load-bearing height adjustment feet:**

- › for the safe mounting of the trench
- › as standard

**5 Eurokonus valve connection:**

- › For fast connection
- › Saves installation time

**6 Sturdy height adjustment feet with sound insulation:**

- › For simple fixing of the floor trench
- › Prevents sound transmission

**7 High-output PowerKon convector:**

- › The proven combination of copper/aluminium
- › With EuroKonus valve connection
- › Suitable for maximum continuous operating pressure of 10 bar and 120°C.
- › Optimised for air flow and heat dissipation
- › Painted graphite-grey

**8 Floor trench:**

- › Galvanised sheet steel
- › Painted graphite grey on both sides
- › With cross bracing to reinforce the floor trench


**A Aluminium roll-up grille, natural anodised:**

- › Double-T profile grille Roll-up or linear grille
- › Bar dimensions 18 x 5 mm (Stainless steel 18 x 6 mm)
- › Bar spacing 9 mm (Stainless steel 10.5 mm)
- › Connections made of corrosion-proof steel springs with spacers in a matching colour
- › 65% free area


## Matching grilles

### Roll-up grilles

**Aluminium**  
Natural anodised




**Aluminium**  
Brass anodised




**Aluminium**  
Bronze anodised




**Aluminium**  
Black anodised




**Aluminium**  
Light Bronze




**Aluminium**  
Painted DB 703




**Stainless steel**  
Natural



**Stainless steel**  
Polished




**Brass**  
Natural CuZn 44






Linear grilles


**Aluminium**  
Natural anodised




**Aluminium**  
Brass anodised



**Aluminium**  
Bronze anodised




**Aluminium**  
Light Bronze



Profile dimensions

**Double-T profile**



► For more grilles, please refer to [Kampmann.co.uk/grilles](http://Kampmann.co.uk/grilles)

The above grilles are shown using a four-colour printing process and thus do not represent an exact reproduction of the original colour.

## Katherm NK – supply air modules ZL




Combination of Katherm NK with supply air module

The Katherm supply air module ZL is available for all trench convectors (Katherm range). This represents a 400 mm long trench, which can be fitted to all designs of Katherm units. Treated supply air can also be fed into rooms through the Katherm supply air module ZL. This is configured with different sizes/ designs of spigots for the most diverse trench dimensions. It is possible to regulate the volumetric flow by means of slider elements in the supply air modules.


### Benefits:

- ▶ available for trench widths and heights as per the table in the Katherm range
- ▶ supply air feed through the Katherm floor trench
- ▶ low leaving air speeds, hence pleasant levels of comfort
- ▶ also suitable for shallow floors of more than 120 mm
- ▶ low noise when correctly designed
- ▶ low investment and maintenance costs
- ▶ supply air outlets visually identical to Katherm trench heaters
- ▶ no wear parts/no electrically rotating parts


Trench width	Trench length	Trench height	Supply air spigots	Designed air volume
[mm]	[mm]	[mm]	[mm]	[m³/h]
182	400	120	oval 51x128	70
182	400	150	DN 80	60
182	400	200	DN 100	90
232	400	120	oval 51x128	70
232	400	150	DN 80	60
232	400	200	DN 100	90
300	400	120	oval 51x128	70
300	400	150	DN 80	60
300	400	200	DN 100	90
380	400	120	oval 51x128	70
380	400	150	DN 80	60
380	400	200	DN 100	90

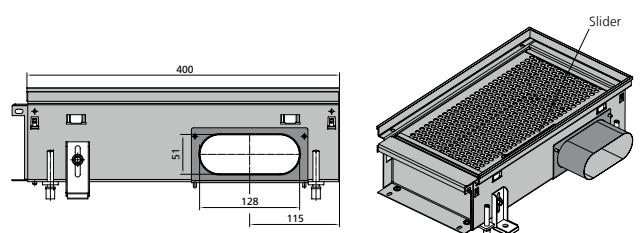

Example of 232/120

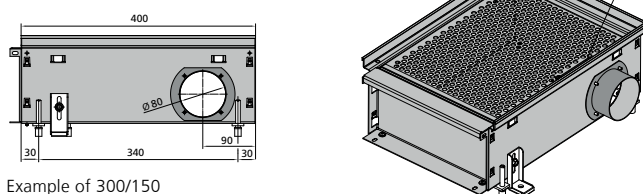

Example of 300/150

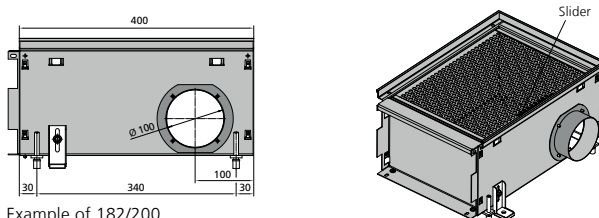

Example of 182/200

## Comfort

Comfort also plays a key role in air conditioning. We'll help you to consider this aspect when designing a project using Kampmann trench heating, at the same time as complying with the current guidelines in DIN EN 15251 (in future DIN EN 16798 Parts 1 and 2) and DIN EN ISO 7730. Essentially the following recommended values can be assumed:



### For heating:

**Supply air outlet air temperature:** 20–26 °C (but not lower than the room temperature)

Outlet speed: < 1,5 m/s

Distance of supply air trench to the constantly occupied area: > 0,5 m



### For cooling:

**Supply air outlet air temperature:**

< 4 K below room temperature

Outlet speed: < 1,2 m/s

Distance of supply air trench to the constantly occupied area: > 1 m

## Other parameters




Consider additional parameters, including room and supply air humidity, as well as leaving air velocity, in individual cases (see DIN EN ISO 7730).

## Additional information

The supply air models Katherm ZL can be used for cooling, heating or isothermal air exchange using preconditioned primary air. A connection or spigot connection at the end is also possible with appropriate trench dimensions and sufficient space in the air outlet area (examination on request!).

The upper limit of the air volume in the spigot is calculated from the maximum air speed and cross-section of the spigot. This speed should not exceed 3.0 m/s to avoid additional sound emissions. The resulting air-side pressure losses vary according to the air volume as per the diagram.


## Design diagrams

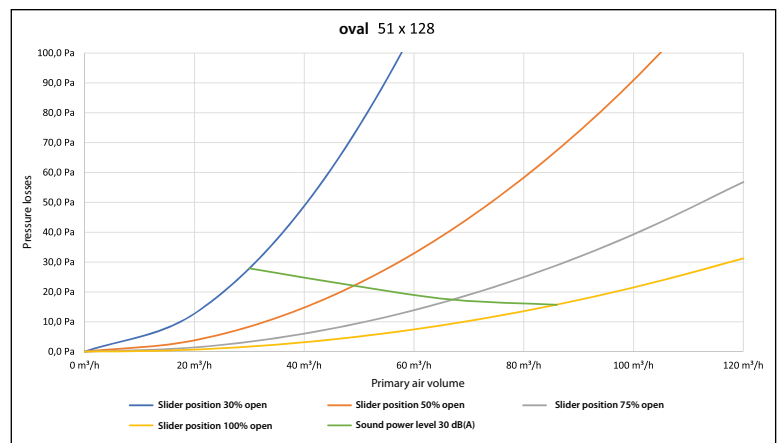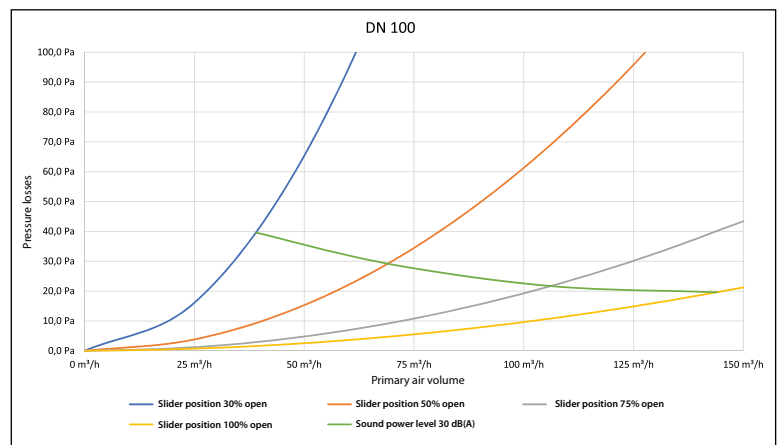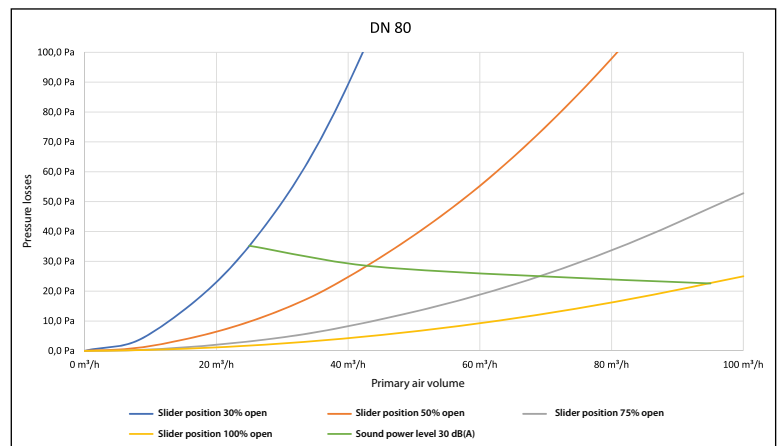



## 02 ► Technical Data

---

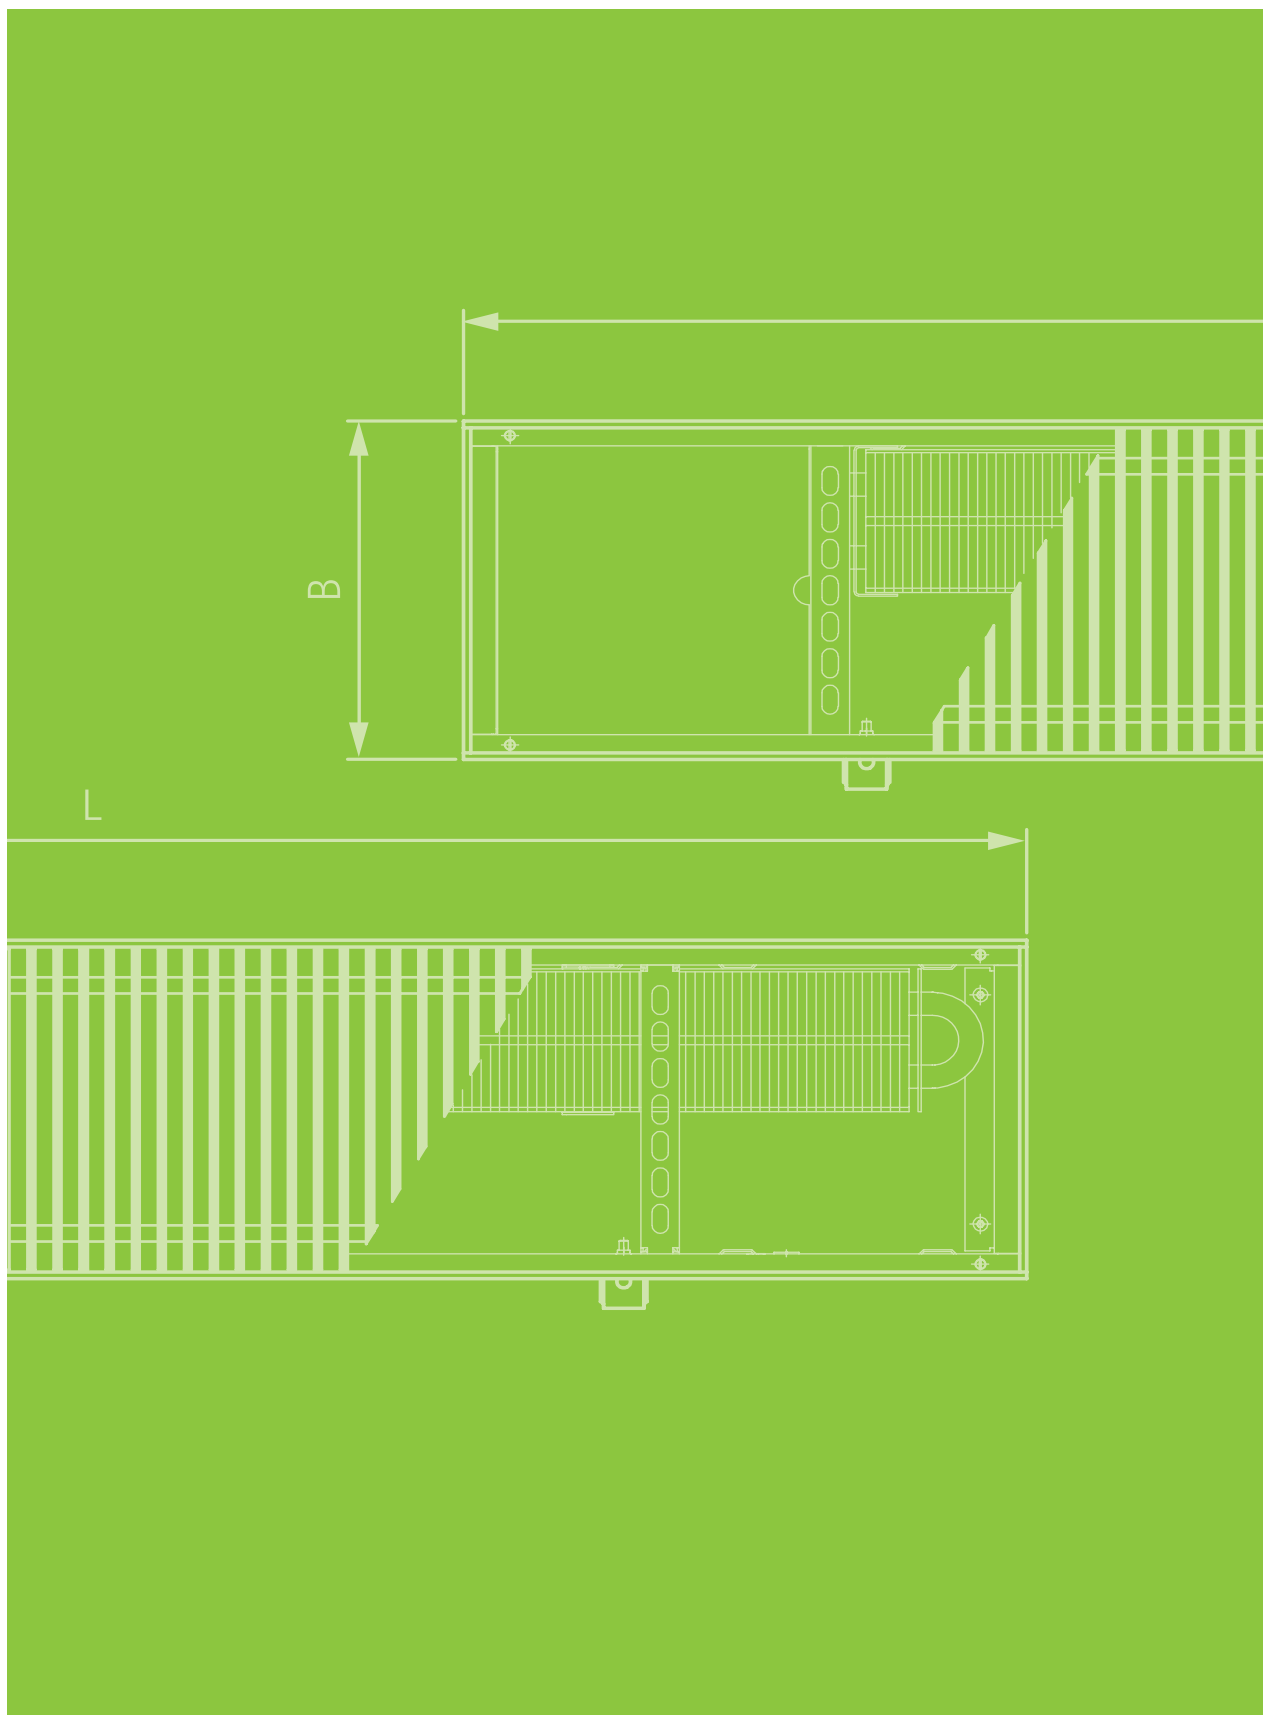

## Advice on Measuring Conditions

### Heat outputs

The heat outputs were measured in accordance with EN 16430 „Fan-assisted heaters, convectors and trench convectors“.

Part 1 „Technical Specification and Requirements“  
Part 2 „Test Method and Evaluation of Heat Output“

The standard regulates the performance measurements specifically of trench convectors based on EN 442 „Radiators and Convectors“.

Part 1 „Technical Specification and Requirements“  
Part 2 „Test Procedure and Performance Data“

The specific requirements for trench heating are taken into account in EN 16430. The reference/air temperature is measured in the centre of the test chamber (2 metres from the external wall) at a height of 0.75 metres). Surface temperature of the external wall 16°C. Practical layout at a distance of 50 mm from the external wall.




Room air laboratory


# Katherm NK 137

Trench Height 92 mm/120 mm


Technical Drawings (Dimensions in mm)

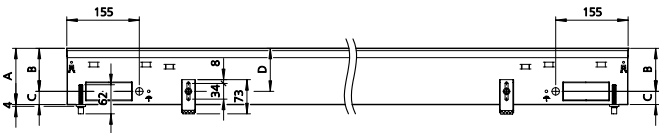

Front view

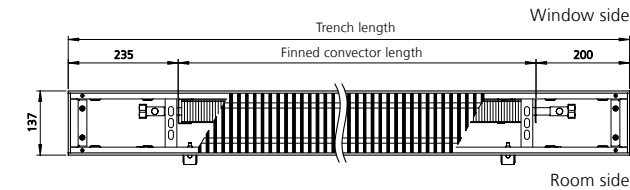

Top view  
(view without cover panel)



Trench height				
A	B	C	D	Max. E
[mm]	[mm]	[mm]	[mm]	[mm]
92	64	28	64	126
120	92	28	92	154

Specifications


Connections, female thread:

Eurokonus, same end,  
left hand side

Make use of our online calculation  
programs to calculate your heat outputs  
and flow rates with a couple of clicks!

► [Kampmann.co.uk/katherm-nk](http://Kampmann.co.uk/katherm-nk)

Water resistance: Heating curve

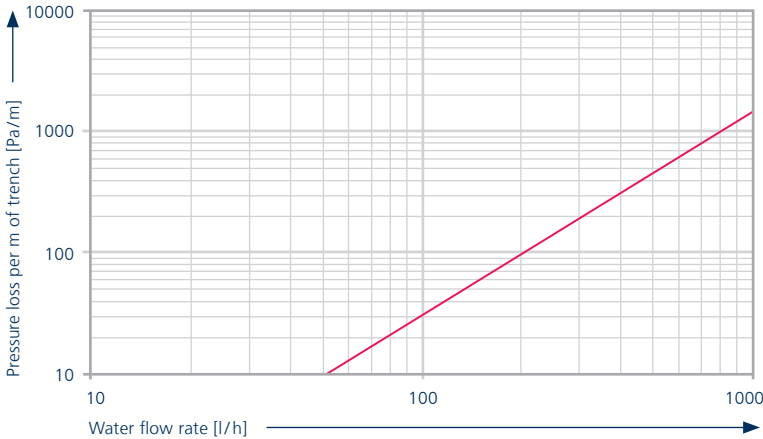



## Services



Trench height	Heat outputs <sup>1)</sup>	
	at LPHW 75 / 65 °C	at LPHW 55 / 45 °C
[mm]	Q <sub>N</sub> [W]	Q [W]
<b>Trench length 800 mm</b>		
<b>92</b>	78	34
<b>120</b>	84	35
<b>Trench length 1000 mm</b>		
<b>92</b>	121	53
<b>120</b>	130	54
<b>Trench length 1200 mm</b>		
<b>92</b>	164	72
<b>120</b>	176	73
<b>Trench length 1400 mm</b>		
<b>92</b>	207	91
<b>120</b>	222	93
<b>Trench length 1600 mm</b>		
<b>92</b>	250	110
<b>120</b>	268	112
<b>Trench length 1800 mm</b>		
<b>92</b>	293	129
<b>120</b>	314	131
<b>Trench length 2000 mm</b>		
<b>92</b>	336	148
<b>120</b>	360	150
<b>Trench length 2200 mm</b>		
<b>92</b>	379	167
<b>120</b>	406	169
<b>Trench length 2400 mm</b>		
<b>92</b>	422	186
<b>120</b>	452	189
<b>Trench length 2600 mm</b>		
<b>92</b>	465	205
<b>120</b>	498	208
<b>Trench length 2800 mm</b>		
<b>92</b>	508	223
<b>120</b>	544	227

[more »](#)


Trench height	Heat outputs <sup>1)</sup>	
	at LPHW 75 / 65 °C	at LPHW 55 / 45 °C
[mm]	Q <sub>N</sub> [W]	Q [W]
<b>Trench length 3000 mm</b>		
<b>92</b>	551	242
<b>120</b>	590	246
<b>Trench length 3200 mm</b>		
<b>92</b>	594	261
<b>120</b>	636	265
<b>Trench length 3400 mm</b>		
<b>92</b>	637	280
<b>120</b>	682	285
<b>Trench length 3600 mm</b>		
<b>92</b>	680	299
<b>120</b>	728	304
<b>Trench length 3800 mm</b>		
<b>92</b>	723	318
<b>120</b>	774	323
<b>Trench length 4000 mm</b>		
<b>92</b>	766	337
<b>120</b>	820	342
<b>Trench length 4200 mm</b>		
<b>92</b>	809	356
<b>120</b>	866	362
<b>Trench length 4400 mm</b>		
<b>92</b>	852	375
<b>120</b>	912	381
<b>Trench length 4600 mm</b>		
<b>92</b>	895	393
<b>120</b>	958	400
<b>Trench length 4800 mm</b>		
<b>92</b>	938	412
<b>120</b>	1004	419
<b>Trench length 5000 mm</b>		
<b>92</b>	981	431
<b>120</b>	1050	438


Q<sub>N</sub> [W] = Standard heat output  
Q [W] = Heat output

<sup>1)</sup> at room temperature t<sub>r</sub> = 20 °C


# Katherm NK 182

Trench Height 92 mm / 120 mm / 150 mm / 200 mm


Technical Drawings (Dimensions in mm)

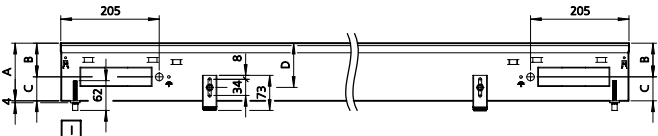


Front view of trench height 92/120 mm

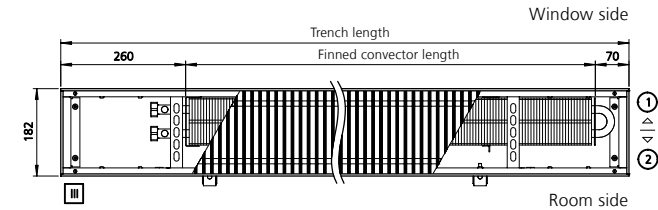


Top view of trench height 92/120 mm (view without cover panel)

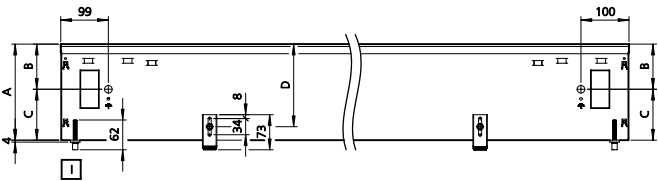


Front view of trench height 150/200 mm

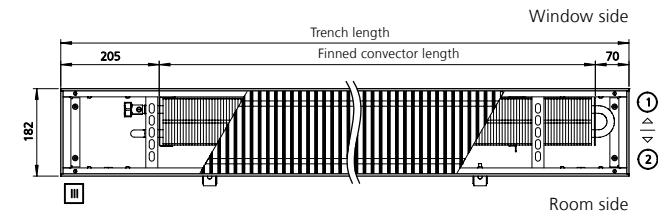

Top view of trench height 150/200 mm (view without cover panel)



Cross-section through trench height 92/120 mm (example shown with roll-up grille)



Cross-section through trench height 150/200 mm (example shown with roll-up grille)

Trench height	A	B	C	D	Max. E
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
92	64	28	64	126	
120	70	50	92	154	
150	94	56	122	184	
200	94	106	172	234	

Specifications


Connections, female thread:

Eurokonus, same end, left hand side

Make use of our online calculation programs to calculate your heat outputs and flow rates with a couple of clicks!

► [Kampmann.co.uk/katherm-nk](http://Kampmann.co.uk/katherm-nk)

Water resistance: Heating curves

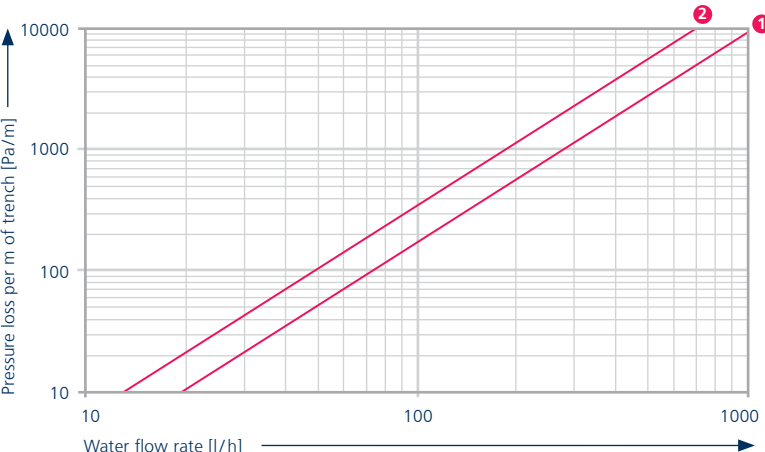

1 Trench height 92 mm/120 mm 2 Trench height 150 mm/200 mm

## Services



Trench height	Heat outputs <sup>1)</sup>	
	at LPHW 75 / 65 °C	at LPHW 55 / 45 °C
[mm]	Q <sub>N</sub> [W]	Q [W]
Trench length 800 mm		
92	132	66
120	162	80
150	206	96
200	232	106
Trench length 1000 mm		
92	187	93
120	230	113
150	285	133
200	320	146
Trench length 1200 mm		
92	242	121
120	298	147
150	364	170
200	408	187
Trench length 1400 mm		
92	298	149
120	367	180
150	442	207
200	496	227
Trench length 1600 mm		
92	353	176
120	435	214
150	521	243
200	584	267
Trench length 1800 mm		
92	409	204
120	503	247
150	599	280
200	673	308
Trench length 2000 mm		
92	464	232
120	571	281
150	678	317
200	761	348
Trench length 2200 mm		
92	519	259
120	639	314
150	757	353
200	849	389

more »



Trench height	Heat outputs <sup>1)</sup>	
	at LPHW 75 / 65 °C	at LPHW 55 / 45 °C
[mm]	Q <sub>N</sub> [W]	Q [W]
Trench length 2400 mm		
92	575	287
120	708	348
150	835	390
200	937	429
Trench length 2600 mm		
92	630	315
120	776	381
150	914	427
200	1025	469
Trench length 2800 mm		
92	686	342
120	844	415
150	992	464
200	1114	510
Trench length 3000 mm		
92	741	370
120	912	448
150	1071	500
200	1202	550
Trench length 3200 mm		
92	796	398
120	980	482
150	1150	537
200	1290	590
Trench length 3400 mm		
92	852	425
120	1049	516
150	1228	574
200	1378	631
Trench length 3600 mm		
92	907	453
120	1117	549
150	1307	610
200	1466	671
Trench length 3800 mm		
92	963	481
120	1185	583
150	1385	647
200	1555	711

more »



Trench height	Heat outputs <sup>1)</sup>	
	at LPHW 75 / 65 °C	at LPHW 55 / 45 °C
[mm]	Q <sub>N</sub> [W]	Q [W]
Trench length 4000 mm		
92	1018	508
120	1253	616
150	1464	684
200	1643	752
Trench length 4200 mm		
92	1073	536
120	1321	650
150	1543	721
200	1731	792
Trench length 4400 mm		
92	1129	563
120	1390	683
150	1621	757
200	1819	833
Trench length 4600 mm		
92	1184	591
120	1458	717
150	1700	794
200	1907	873
Trench length 4800 mm		
92	1240	619
120	1526	750
150	1778	831
200	1966	913
Trench length 5000 mm		
92	1295	646
120	1594	784
150	1857	867
200	2084	954

Q<sub>N</sub> [W] = Standard heat output  
Q [W] = Heat output


<sup>1)</sup> at room temperature t<sub>r</sub> = 20 °C




# Katherm NK 232

Trench Height 92 mm / 120 mm / 150 mm / 200 mm


Technical Drawings (Dimensions in mm)

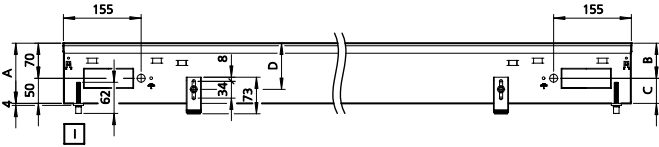


Front view of trench height 92/120 mm

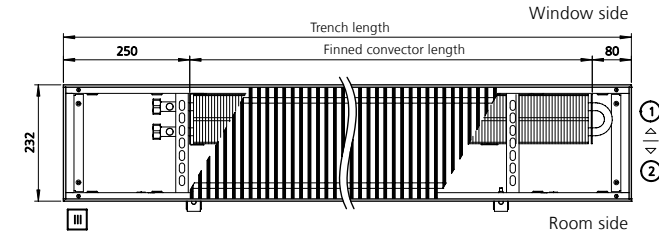


Top view of trench height 92/120 mm  
(view without cover panel)

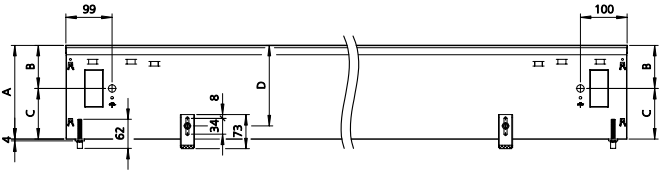


Front view of trench height 150/200 mm

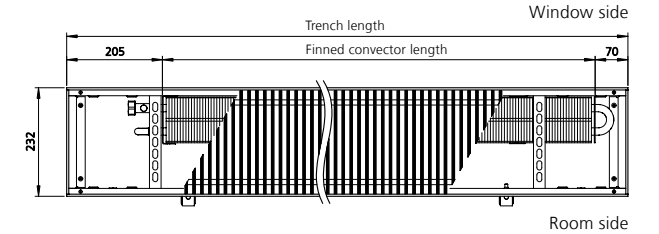

Top view of trench height 150/200 mm  
(view without cover panel)



Cross-section through trench height 92/120 mm  
(example shown with roll-up grille)



Cross-section through trench height 150/200 mm  
(example shown with roll-up grille)

Trench height	A	B	C	D	Max. E
	[mm]	[mm]	[mm]	[mm]	[mm]
92	64	28	64	126	
120	70	50	92	154	
150	92	58	122	184	
200	92	108	172	234	

Specifications


Connections, female thread:

Eurokonus, same end,  
left hand side

Make use of our online calculation  
programs to calculate your heat outputs  
and flow rates with a couple of clicks!

► [Kampmann.co.uk/katherm-nk](http://Kampmann.co.uk/katherm-nk)

Water resistance: Heating curves

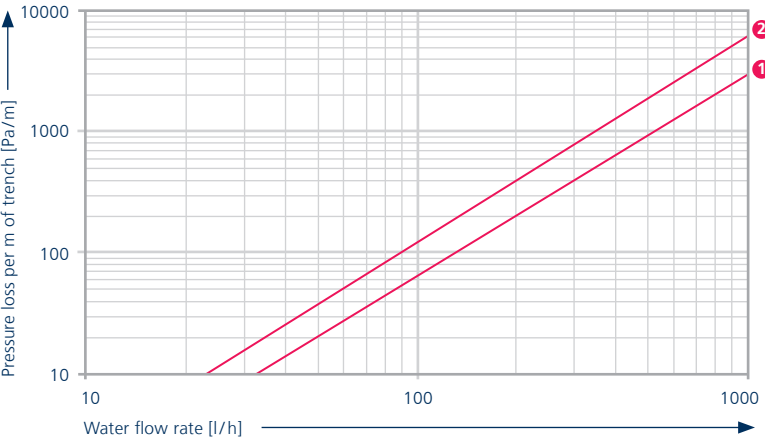

1 Trench height 92 mm/120 mm 2 Trench height 150 mm/200 mm

## Services



Trench height	Heat outputs <sup>1)</sup>	
	at LPHW 75 / 65 °C	at LPHW 55 / 45 °C
[mm]	Q <sub>N</sub> [W]	Q [W]
<b>Trench length 800 mm</b>		
92	157	76
120	193	93
150	309	146
200	334	160
<b>Trench length 1000 mm</b>		
92	222	108
120	273	132
150	426	202
200	462	221
<b>Trench length 1200 mm</b>		
92	288	139
120	354	171
150	544	258
200	589	282
<b>Trench length 1400 mm</b>		
92	353	171
120	434	210
150	662	314
200	717	343
<b>Trench length 1600 mm</b>		
92	419	203
120	515	249
150	779	370
200	844	404
<b>Trench length 1800 mm</b>		
92	484	234
120	595	288
150	897	425
200	971	466
<b>Trench length 2000 mm</b>		
92	549	266
120	675	327
150	1014	481
200	1099	527
<b>Trench length 2200 mm</b>		
92	615	298
120	756	366
150	1132	537
200	1226	588

more »



Trench height	Heat outputs <sup>1)</sup>	
	at LPHW 75 / 65 °C	at LPHW 55 / 45 °C
[mm]	Q <sub>N</sub> [W]	Q [W]
<b>Trench length 2400 mm</b>		
92	680	329
120	836	405
150	1250	593
200	1354	649
<b>Trench length 2600 mm</b>		
92	746	361
120	917	444
150	1367	648
200	1481	710
<b>Trench length 2800 mm</b>		
92	811	393
120	997	483
150	1485	704
200	1608	771
<b>Trench length 3000 mm</b>		
92	876	424
120	1077	522
150	1602	760
200	1736	832
<b>Trench length 3200 mm</b>		
92	942	456
120	1158	561
150	1720	816
200	1863	893
<b>Trench length 3400 mm</b>		
92	1007	488
120	1238	599
150	1838	872
200	1991	954
<b>Trench length 3600 mm</b>		
92	1073	519
120	1319	638
150	1955	927
200	2118	1015
<b>Trench length 3800 mm</b>		
92	1138	551
120	1399	677
150	2073	983
200	2245	1076

more »



Trench height	Heat outputs <sup>1)</sup>	
	at LPHW 75 / 65 °C	at LPHW 55 / 45 °C
[mm]	Q <sub>N</sub> [W]	Q [W]
<b>Trench length 4000 mm</b>		
92	1203	583
120	1479	716
150	2190	1039
200	2373	1137
<b>Trench length 4200 mm</b>		
92	1269	614
120	1560	755
150	2308	1095
200	2500	1198
<b>Trench length 4400 mm</b>		
92	1334	646
120	1640	794
150	2426	1151
200	2628	1259
<b>Trench length 4600 mm</b>		
92	1400	678
120	1721	833
150	2543	1206
200	2755	1320
<b>Trench length 4800 mm</b>		
92	1465	709
120	1801	872
150	2661	1262
200	2882	1381
<b>Trench length 5000 mm</b>		
92	1530	741
120	1881	911
150	2778	1318
200	3010	1442

Q<sub>N</sub> [W] = Standard heat output  
Q [W] = Heat output


<sup>1)</sup> at room temperature t<sub>r</sub> = 20 °C




# Katherm NK 300

Trench Height 92 mm / 120 mm / 150 mm / 200 mm


Technical Drawings (Dimensions in mm)

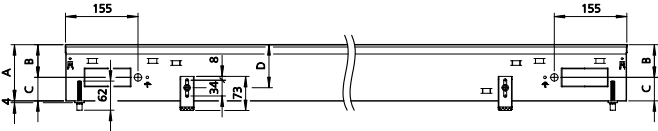


Front view of trench height 92/120 mm

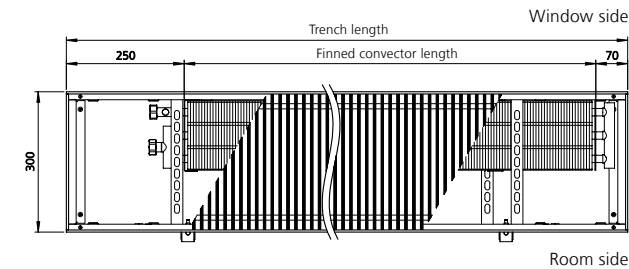


Top view of trench height 92/120 mm (view without cover panel)

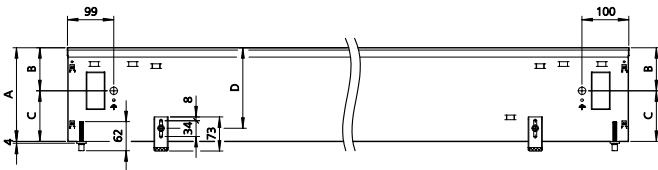


Front view of trench height 150/200 mm

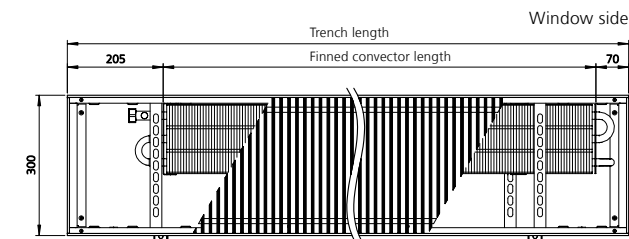

Top view of trench height 150/200 mm (view without cover panel)



Cross-section through trench height 92/120 mm (example shown with roll-up grille)



Cross-section through trench height 150/200 mm (example shown with roll-up grille)

Trench height	A	B	C	D	Max. E
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
92	62	28	64	126	
120	70	50	92	154	
150	92	58	122	184	
200	92	108	172	234	

Specifications


Connections, female thread:

Eurokonus, same end,  
left hand side

Make use of our online calculation  
programs to calculate your heat outputs  
and flow rates with a couple of clicks!

► [Kampmann.co.uk/katherm-nk](http://Kampmann.co.uk/katherm-nk)

Water resistance: Heating curves

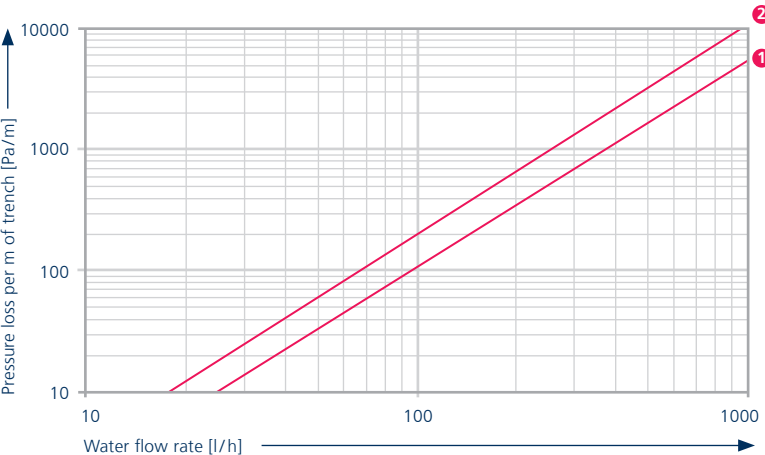

1 Trench height 92 mm/120 mm 2 Trench height 150 mm/200 mm

## Services



Trench height	Heat outputs <sup>1)</sup>	
	at LPHW 75 / 65 °C	at LPHW 55 / 45 °C
[mm]	Q <sub>N</sub> [W]	Q [W]
Trench length 800 mm		
92	209	104
120	268	133
150	394	189
200	445	211
Trench length 1000 mm		
92	296	147
120	379	188
150	544	261
200	614	291
Trench length 1200 mm		
92	383	190
120	491	244
150	694	333
200	784	372
Trench length 1400 mm		
92	470	233
120	602	299
150	844	404
200	953	452
Trench length 1600 mm		
92	557	277
120	714	354
150	994	476
200	1122	532
Trench length 1800 mm		
92	644	320
120	825	410
150	1144	548
200	1292	613
Trench length 2000 mm		
92	731	363
120	937	465
150	1294	620
200	1461	693
Trench length 2200 mm		
92	818	406
120	1048	521
150	1444	692
200	1631	774

more »



Trench height	Heat outputs <sup>1)</sup>	
	at LPHW 75 / 65 °C	at LPHW 55 / 45 °C
[mm]	Q <sub>N</sub> [W]	Q [W]
Trench length 2400 mm		
92	905	449
120	1160	576
150	1594	764
200	1800	854
Trench length 2600 mm		
92	992	493
120	1271	631
150	1744	836
200	1970	934
Trench length 2800 mm		
92	1079	536
120	1383	687
150	1894	908
200	2139	1015
Trench length 3000 mm		
92	1166	579
120	1494	742
150	2044	980
200	2308	1095
Trench length 3200 mm		
92	1253	622
120	1606	798
150	2194	1052
200	2478	1175
Trench length 3400 mm		
92	1340	665
120	1717	853
150	2344	1123
200	2647	1256
Trench length 3600 mm		
92	1427	709
120	1829	908
150	2494	1195
200	2817	1336
Trench length 3800 mm		
92	1514	752
120	1940	964
150	2644	1267
200	2986	1416

more »



Trench height	Heat outputs <sup>1)</sup>	
	at LPHW 75 / 65 °C	at LPHW 55 / 45 °C
[mm]	Q <sub>N</sub> [W]	Q [W]
Trench length 4000 mm		
92	1601	795
120	2052	1019
150	2794	1339
200	3156	1497
Trench length 4200 mm		
92	1688	838
120	2163	1074
150	2944	1411
200	3325	1577
Trench length 4400 mm		
92	1775	882
120	2275	1130
150	3094	1483
200	3494	1658
Trench length 4600 mm		
92	1862	925
120	2386	1185
150	3244	1555
200	3664	1738
Trench length 4800 mm		
92	1949	968
120	2498	1241
150	3395	1627
200	3833	1818
Trench length 5000 mm		
92	2036	1011
120	2609	1296
150	3545	1699
200	4003	1899


Q<sub>N</sub> [W] = Standard heat output  
Q [W] = Heat output

<sup>1)</sup> at room temperature t<sub>r</sub> = 20 °C


# Katherm NK 380

Trench Height 92 mm / 120 mm / 150 mm / 200 mm


Technical Drawings (Dimensions in mm)

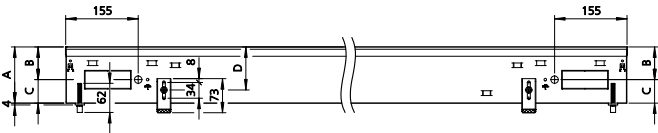


Front view of trench height 92/120 mm

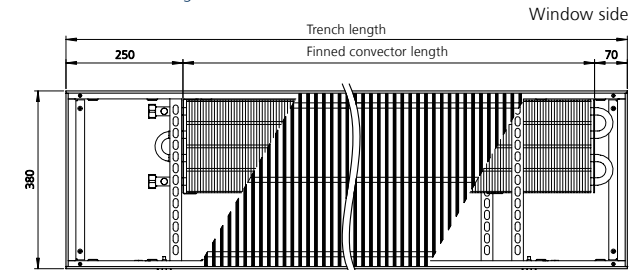


Top view of trench height 92/120 mm (view without cover panel)

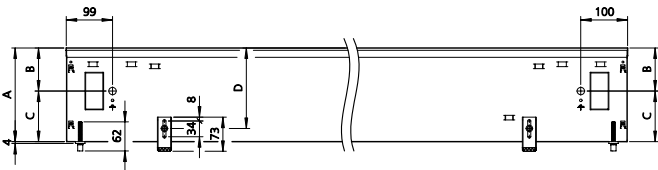


Front view of trench height 150/200 mm

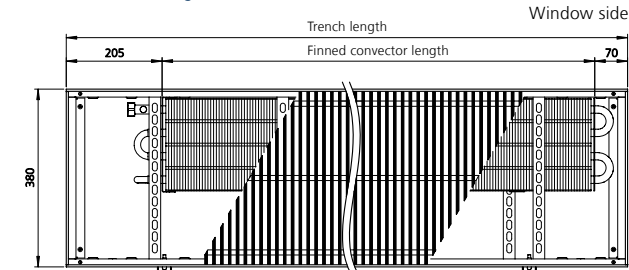

Top view of trench height 150/200 mm (view without cover panel)



Cross-section through trench height 92/120 mm (example shown with roll-up grille)



Cross-section through trench height 150/200 mm (example shown with roll-up grille)

Trench height	A	B	C	D	Max. E
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
92	64	28	64	126	
120	70	50	92	154	
150	92	58	122	184	
200	92	108	172	234	

Specifications


Connections, female thread:

Eurokonus, same end,  
left hand side

Make use of our online calculation  
programs to calculate your heat outputs  
and flow rates with a couple of clicks!

► [Kampmann.co.uk/katherm-nk](http://Kampmann.co.uk/katherm-nk)

Water resistance: Heating curves

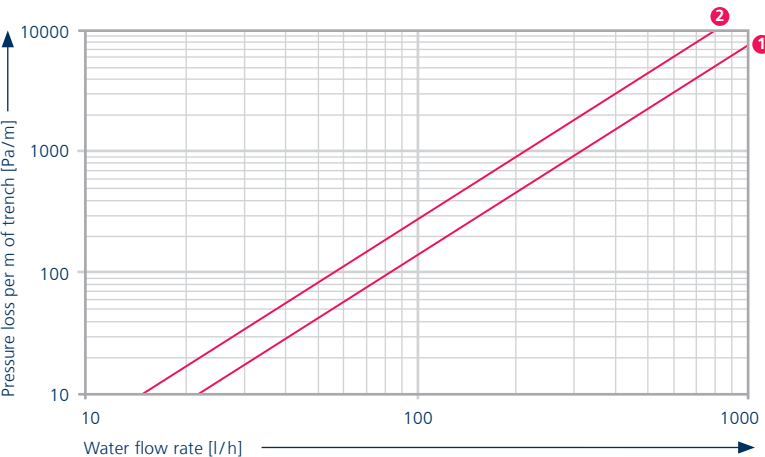

1 Trench height 92 mm/120 mm 2 Trench height 150 mm/200 mm



## Services



Trench height	Heat outputs <sup>1)</sup>	
	at LPHW 75 / 65 °C	at LPHW 55 / 45 °C
[mm]	Q <sub>N</sub> [W]	Q [W]
<b>Trench length 800 mm</b>		
92	279	142
120	344	173
150	485	235
200	621	299
<b>Trench length 1000 mm</b>		
92	395	201
120	487	246
150	669	324
200	858	413
<b>Trench length 1200 mm</b>		
92	511	260
120	631	318
150	854	413
200	1094	527
<b>Trench length 1400 mm</b>		
92	627	319
120	774	390
150	1039	503
200	1331	641
<b>Trench length 1600 mm</b>		
92	743	379
120	917	463
150	1223	592
200	1568	755
<b>Trench length 1800 mm</b>		
92	859	438
120	1060	535
150	1408	682
200	1804	869
<b>Trench length 2000 mm</b>		
92	975	497
120	1204	607
150	1593	771
200	2041	983
<b>Trench length 2200 mm</b>		
92	1091	556
120	1347	679
150	1777	860
200	2278	1097

more »



Trench height	Heat outputs <sup>1)</sup>	
	at LPHW 75 / 65 °C	at LPHW 55 / 45 °C
[mm]	Q <sub>N</sub> [W]	Q [W]
<b>Trench length 2400 mm</b>		
92	1207	615
120	1490	752
150	1962	950
200	2514	1211
<b>Trench length 2600 mm</b>		
92	1323	674
120	1634	824
150	2147	1039
200	2751	1325
<b>Trench length 2800 mm</b>		
92	1440	733
120	1777	896
150	2331	1129
200	2987	1439
<b>Trench length 3000 mm</b>		
92	1556	793
120	1920	968
150	2516	1218
200	3224	1553
<b>Trench length 3200 mm</b>		
92	1672	852
120	2064	1041
150	2700	1307
200	3461	1667
<b>Trench length 3400 mm</b>		
92	1788	911
120	2207	1113
150	2885	1397
200	3697	1781
<b>Trench length 3600 mm</b>		
92	1904	970
120	2350	1185
150	3070	1486
200	3934	1895
<b>Trench length 3800 mm</b>		
92	2020	1029
120	2493	1258
150	3254	1576
200	4171	2009

more »



Trench height	Heat outputs <sup>1)</sup>	
	at LPHW 75 / 65 °C	at LPHW 55 / 45 °C
[mm]	Q <sub>N</sub> [W]	Q [W]
<b>Trench length 4000 mm</b>		
92	2136	1088
120	2637	1330
150	3439	1665
200	4407	2123
<b>Trench length 4200 mm</b>		
92	2252	1148
120	2780	1402
150	3624	1754
200	4644	2237
<b>Trench length 4400 mm</b>		
92	2368	1207
120	2923	1474
150	3808	1844
200	4881	2351
<b>Trench length 4600 mm</b>		
92	2484	1266
120	3067	1547
150	3993	1933
200	5117	2465
<b>Trench length 4800 mm</b>		
92	2601	1325
120	3210	1619
150	4178	2023
200	5354	2579
<b>Trench length 5000 mm</b>		
92	2717	1384
120	3353	1691
150	4362	2112
200	5590	2693

Q<sub>N</sub> [W] = Standard heat output

Q [W] = Heat output

<sup>1)</sup> at room temperature t<sub>r</sub> = 20 °C

# 03 ▶ Design information

---



## Information on Planning and Design

Katherm NK are suitable for use in all kinds of buildings demanding heating. Katherm NK are also used to efficiently combat condensation on external glazing.

They are generally position directly in front of the external façade without a large gap. Katherm NK provide effective heating, particularly in front of large areas of glazing.

### Air outlet

All Katherm NK are positioned with the convector on the window side. The warm air rising up the exterior façade flows draught-free into the room, guaranteeing optimum cold air screening.

### Heat outputs

The heat outputs were tested in accordance with EN 16430. We would recommend our online calculation programs to convert to other operating conditions.

[Kampmann.co.uk/katherm-nk](http://Kampmann.co.uk/katherm-nk)

Make use of our online calculation programs to calculate your heat outputs and flow rates with a couple of clicks!


► [Kampmann.co.uk/katherm-nk](http://Kampmann.co.uk/katherm-nk)



## 04 ► Control

### Convenient surface- or flush-mounted electrical control

**Room thermostat, surface-mounted**

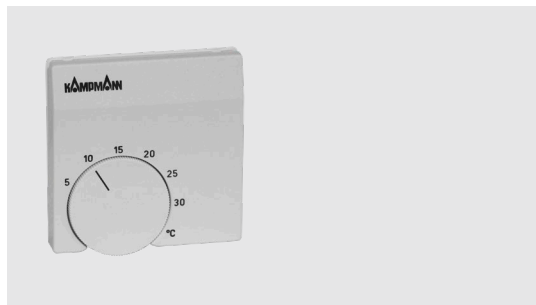

In an attractively styled flat surface-mounted housing, with thermal feedback. A 55 mm diameter back box is needed for installation.

**Product Features**

- Housing: Surface-mounted, white
- Voltage: 230 V/50 Hz
- Temperature setting range: 5–30°C
- Switching differential: 0.6 K
- Protection class: IP30
- Dimensions W x H x D: 70 x 70 x 35 mm

**Room thermostat, flush-mounted**



Flush-mounted, with temperature setpoint indicator, main on/off switch with indicator light, thermal feedback and additional signal input for night setback (4 K) via an external timer.

**Product features**

- Housing: Jung system, flush-mounted, alpine white
- Voltage: 230 V/50 Hz
- Temperature setting range: 5–30°C
- Protection class: IP20
- Dimensions W x H x D: 65 x 65 x 42 mm

**Clock thermostat, surface-mounted**

Combination of room and clock thermostat:  
The precise digital clock with weekly program or day program can be used. The required room temperature and the setback temperature can be set easily and clearly. The „Party switch“ enables a setback interval to be over-ridden. Day or night temperatures can be switched on permanently.

**Product features**

- ▶ Voltage: 230 V/50 Hz
- ▶ Temperature setting range: 10–30°C
- ▶ Protection class: IP20
- ▶ Dimensions W x H x D: 140 x 70 x 30 mm

**Clock thermostat, flush-mounted**

Combination of room and clock thermostat, flush-mounted, large-screen display of set and actual values, control panel with four buttons for setting day or weekly programs, party function, frost protection, pre-set and adjustable time programs with summer/winter changeover, maximum 9 switching times per day, block switching times are possible.

**Product features**

- ▶ Housing: white
- ▶ Voltage: 230 V/50 Hz
- ▶ Temperature setting range: 5–30°C
- ▶ Protection class: IP20
- ▶ Power reserve: approx. 10 years
- ▶ N/O contact: potential-free
- ▶ Max. current load: 4 A
- ▶ Dimensions W x H x D: 80.5 x 80.5 x 17.5 mm (installed height)


**Suggested control option**

One possible electrical control option is the combination of room thermostat and the appropriate number of actuators and valves.

The required room temperature is set on the room thermostat. If the room temperature falls below this setpoint, the thermoelectric valve opens the waterside valve.

**Overview of valve bodies, pre-adjustable/return shut-off valves**

Trench height	Flow Eurokonus connection	Return Eurokonus connection
[mm]		
NK 137		
92	Valve, axial, type 194000346911	Return shut-off valve, straight type 194000145952
120		
NK 182		
92	Valve, axial, type 194000346911	Return shut-off valve, straight type 194000145952
120		
150	Valve, straight, type 194000346909	
200		
NK 232, NK 330, NK 380		
92	Valve, straight, type 194000346909	Return shut-off valve, straight type 194000145952
120		
150		
200		

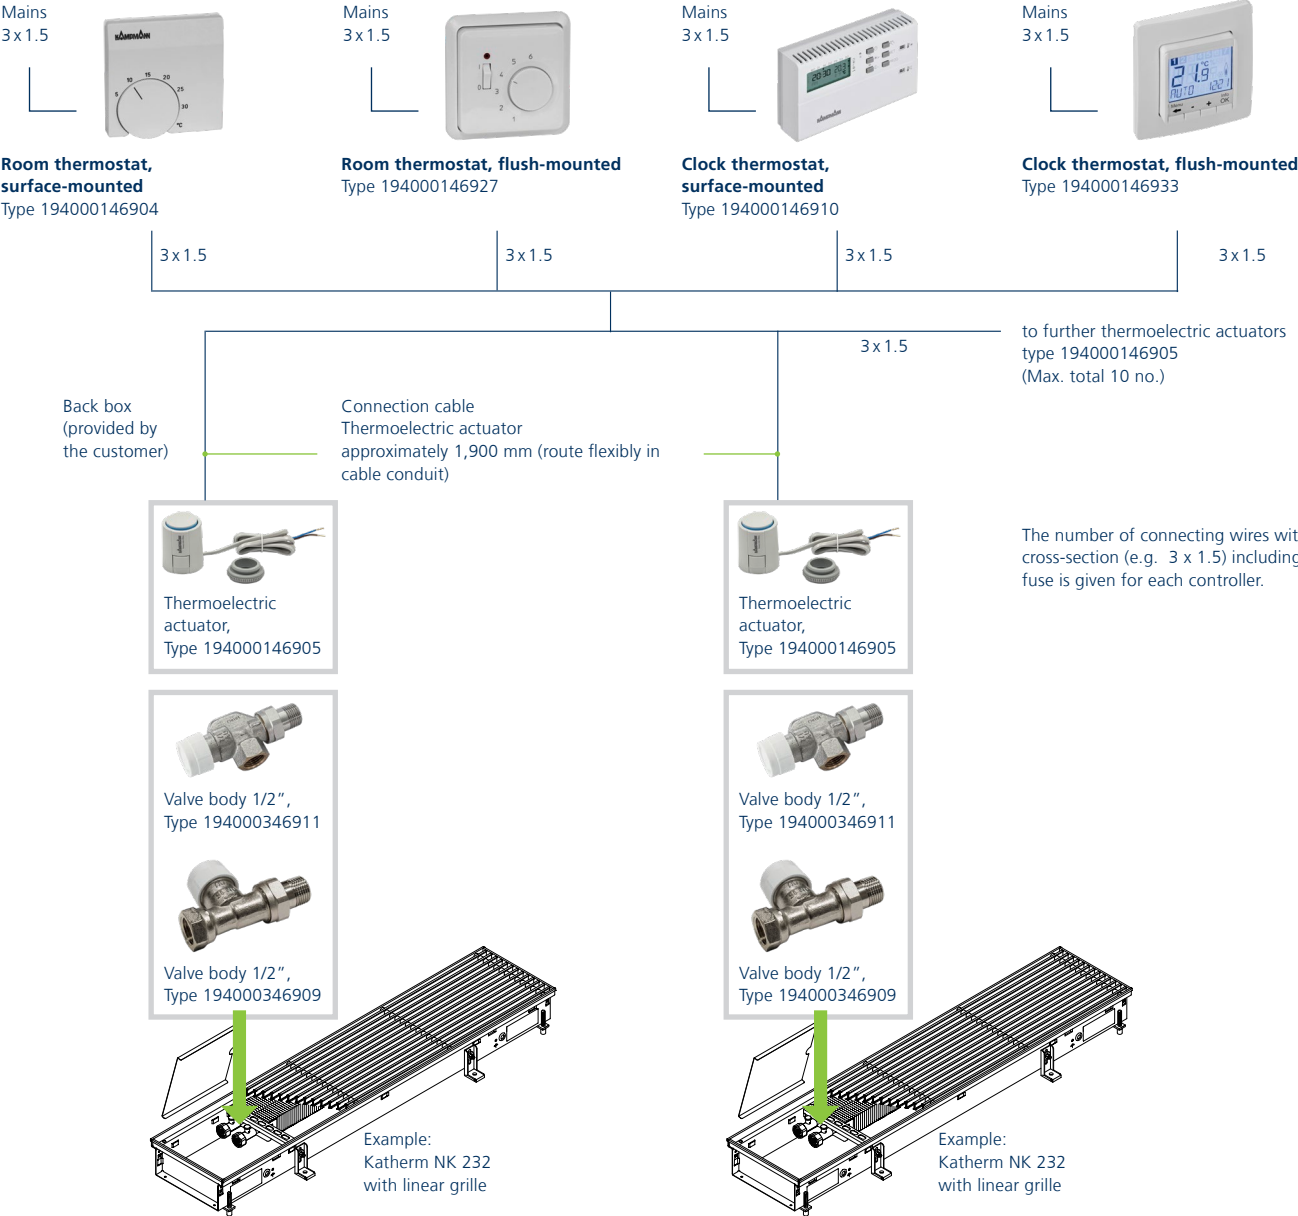




# 05 ▶ Ordering Information

## Katherm NK

Model	Trench width	Trench height	Grille finish	Art. no.
	[mm]	[mm]		
Trench: 800 mm – 5000 mm				
NK 137	182	92	Roll-up grille	145140911111
			Linear grille	145140931111
		120	Roll-up grille	145141211111
			Linear grille	145141231111
NK 182	182	92	Roll-up grille	145190911111
			Linear grille	145190931111
		120	Roll-up grille	145191211111
			Linear grille	145191231111
		150	Roll-up grille	145191511111
			Linear grille	145191531111
		200	Roll-up grille	145192011111
			Linear grille	145192031111
NK 232	232	92	Roll-up grille	145240911111
			Linear grille	145240931111
		120	Roll-up grille	145241211111
			Linear grille	145241231111
		150	Roll-up grille	145241511111
			Linear grille	145241531111
		200	Roll-up grille	145242011111
			Linear grille	145242031111
NK 300	300	92	Roll-up grille	145300911111
			Linear grille	145300931111
		120	Roll-up grille	145301211111
			Linear grille	145301231111
		150	Roll-up grille	145301511111
			Linear grille	145301531111
		200	Roll-up grille	145302011111
			Linear grille	145302031111
NK 380	380	92	Roll-up grille	145380911111
			Linear grille	145380931111
		120	Roll-up grille	145381211111
			Linear grille	145381231111
		150	Roll-up grille	145381511111
			Linear grille	145381531111
		200	Roll-up grille	145382011111
			Linear grille	145382031111



Trench heaters are supplied as standard with a natural anodised aluminium grille. This can be replaced by one of the following grilles at a surcharge. Please change the two red digits to the left of the red line in the article number to select an alternative grille.

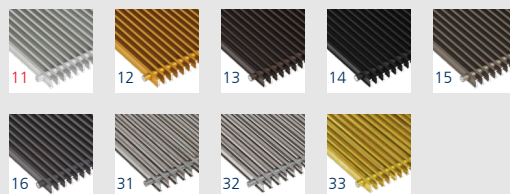

Article key for grille finish (Example of Art. no.)

145140911111	→	Aluminium, natural anodised (standard)
12	→	Aluminium, brass anodised
13	→	Aluminium, bronze anodised
14	→	Aluminium, black anodised
15	→	Aluminium, light bronze
16	→	Aluminium, painted DB 703
31	→	Stainless steel, natural
32	→	Stainless steel, polished
33	→	Brass, natural CuZn 44

The available convector lengths are in 200 mm increments (800 mm to 5000 mm). Please change the two red digits to the right of the red line in the article number to select the required convector length.

Article key for grille finish (Example of Art. no.)

1451409111	11	→	Trench length 800 mm
	15	→	Trench length 1000 mm
	19	→	Trench length 1200 mm
	23	→	Trench length 1400 mm
	27	→	Trench length 1600 mm
	31	→	Trench length 1800 mm
	35	→	Trench length 2000 mm
	39	→	Trench length 2200 mm
	43	→	Trench length 2400 mm
	47	→	Trench length 2600 mm
	51	→	Trench length 2800 mm
	55	→	Trench length 3000 mm
	59	→	Trench length 3200 mm
	63	→	Trench length 3400 mm
	67	→	Trench length 3600 mm
	71	→	Trench length 3800 mm
	75	→	Trench length 4000 mm
	79	→	Trench length 4200 mm
	83	→	Trench length 4400 mm
	87	→	Trench length 4600 mm
	91	→	Trench length 4800 mm
	95	→	Trench length 5000 mm

## Accessories

Figure	Article	Properties	Suitable for	Art. no.
Thermostats				
	Room thermostat	230 V, flush-mounted, white front / frame	all Katherm NK	194000146927
		230 V, surface-mounted, white	all Katherm NK	194000146904
	Electronic clock thermostat	surface-mounted, 230 V, white, with day / night / week programme	all Katherm NK	194000146910
	Clock thermostat	flush-mounted, 230 V, white	all Katherm NK	194000146933
Valves				
	Vale body, axial, connection 1/2" pre-settable	as a low-noise, flow-optimised design with stainless steel spindle and double O-ring seal, to fit Katherm NK with actuator art. no. 194000146905, max. operating temperature 120°C, max. operating pressure 10 bar	NK 137, NK 182 (trench height 92 mm, 120 mm)	194000346911
	Valve body, straight, connection 1/2", pre-settable		NK 182 (trench height 150 mm, 200 mm), NK 232, NK 330, NK 380	194000346909
Return valves				
	Return shut-off valve, straight, connection 1/2"	brass, nickel-plated housing, with O-ring seal, max operating temperature 120°C, maximum operating pressure 10 bar	all Katherm NK	194000145952
	Adjustment key	pre-settable	Valve bodies Art. no. 194000346911, Art. no. 194000346909	194000346915
Valve actuators				
	Thermoelectric actuator, 230 V	Power uptake approx. 5 W, Connecting cable length approx. 1,900 mm Overall height 69 mm, diameter 42 mm, Connection thread 30 x 1.5 mm	Valve bodies Art. no. 194000346911, Art. no. 194000346909	194000146905
Other accessories				
	Installation cover	made of timber; on request all Katherm NK units can be supplied with the grilles separately packed to prevent soiling or damage on site prior to fitting.	NK 137	194000100913
			NK 182	194000100918
			NK 232	194000100923
			NK 300	194000100930
			NK 38	194000100938

[Kampmann.co.uk/katherm-nk](https://Kampmann.co.uk/katherm-nk)

**Kampmann UK Ltd.**  
Dial House, Govett Avenue  
Shepperton, Middlesex, TW17 8AG  
Great Britain

**T** +44 (0)1932 228592  
**F** +44 (0)1932 228949  
**E** [info@kampmann.co.uk](mailto:info@kampmann.co.uk)  
**W** [Kampmann.co.uk](https://Kampmann.co.uk)

